


性能参数表/Technical Parameter

项目/Item	机构名称 Mechanism		运行机构/Travel Mechanism		
	起升机构/Lift Mechanism	副起升/Aux Lift	小车/Trolley	大车/Crane	
起重量/Capacity	t	45, 15	轨距/Gauge m	3, 22	
起升速度/Lift Speed	m/min	6.3, 10.5	运行速度/Travel Speed	m/min	38, 45
工作级别/Work Group	M7, M6	M6, M7	缓冲行程/Buffer Stroke	mm	94, 188
最大起升高度/Max Lift Height	m	16, 18	最大轮压/Max Wheel Load	KN	175.9, 415
总功率/Total Power	KW		14.9		
电源/Voltage	3AC 415V 50Hz		钢轨/Rail	P43, QU80	

配置表/Configuration Table

名称/Name	主起升/Main Lift	副起升/Aux Lift	小车/Trolley	大车/Crane
电动机/Motor	YZR315M-10C(H)	YZR250M1-6(H)	YZR160L-6(H)	YZR200L-8(H)
功率/Power	75	37	11(double stretch shaft)	2x13
制动器/Brake	2xYWZ-400/125	2XYWZ-300/45	YWZ-200/25	2xYWZ-300/25
减速机/Reducer	ZQA1000-48.57-3CA	ZQA750-48.57-3CA	ZSC750-38.97-1	ZQ500-40.17-1/2
钢丝绳/Wire Rope	24NAT-679W+1WR1870	18NAT-679W+1WR1870	Wheel Group 4xφ500	Wheel Group 4xφ800
卷筒/Drum	φ800X2500	φ500X1700		

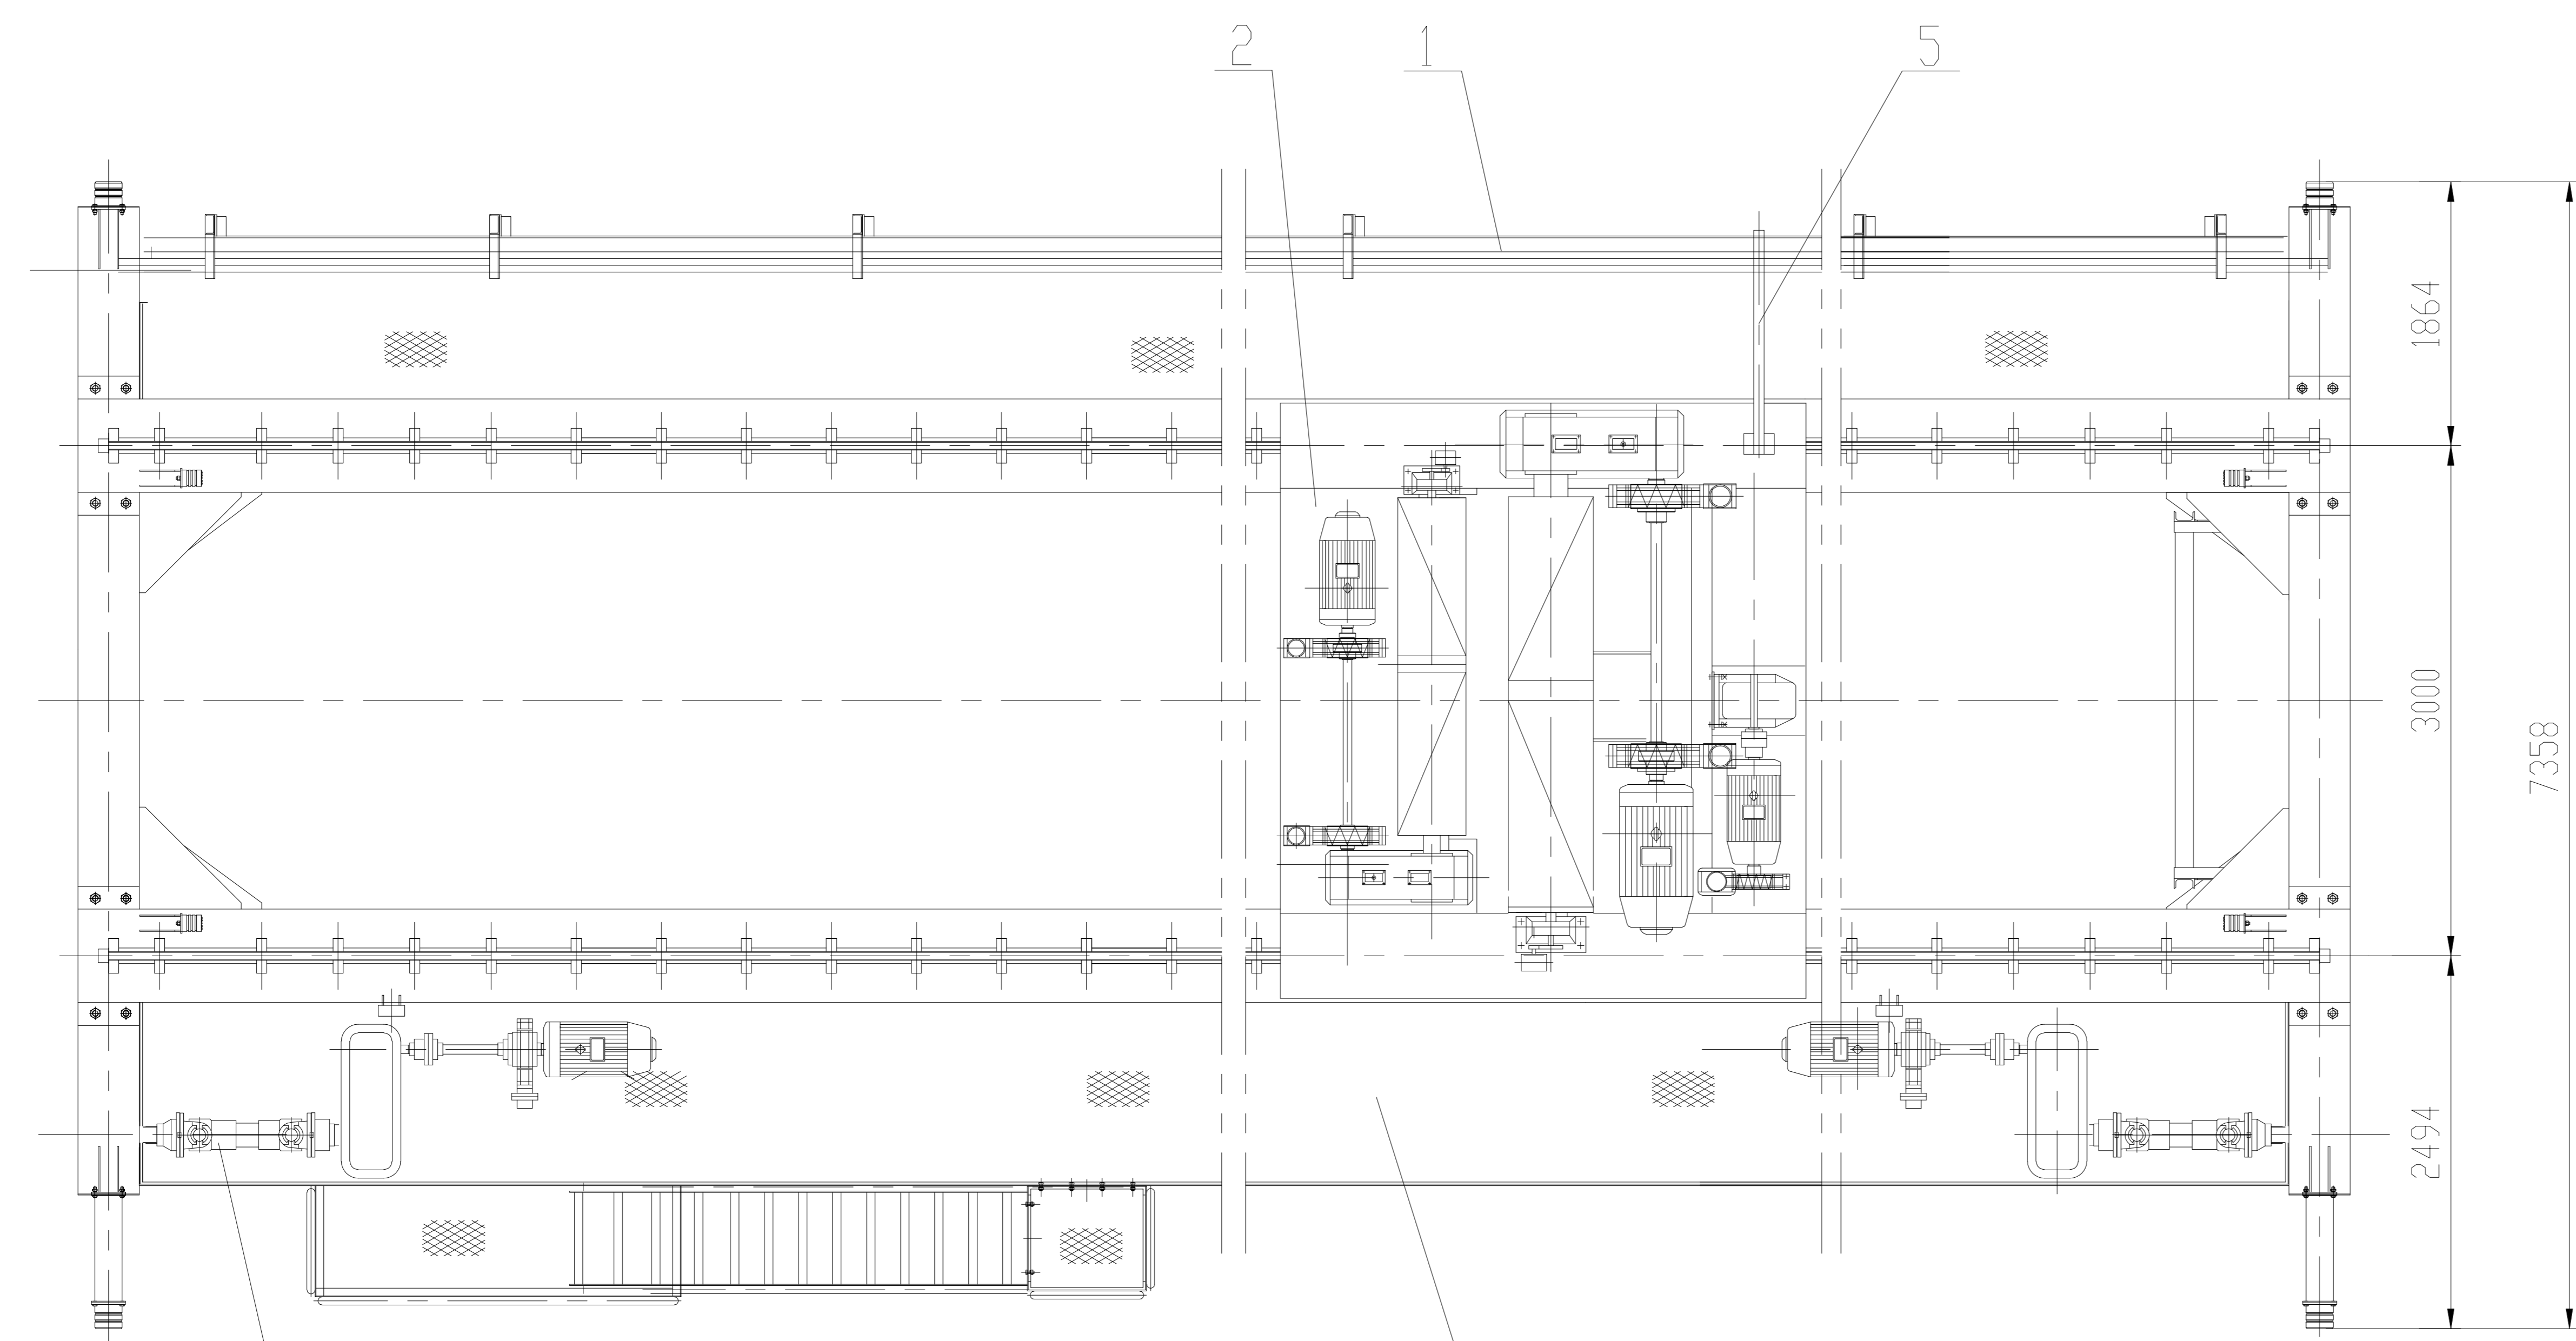

Technical Parameter

- Crane's assembly, installation should accord with the requirement of GB/T 14405-2011.
- Cabin is divided into open type, close type, and thermal insulation type. The entrance include side, top. And the cabin can be installed on right or left.

序号/No.	代号/Code	名称/Name	材料/Material	数量/QTY	每件/Unit 重量/Weight (kg)	共计/Total 重量/Weight (kg)	备注/Mark
6		隔热层/Thermal-protective coating	铸件/Parts	2			
5		小车导电梁/Winch conductive frame	铸件/Parts	1			
4		桥架/Bridge Structure	成品/Product	1			
3		大车运行机构/Crane traveling mechanism	铸件/Parts	1			
2		卷扬小车/Winch	铸件/Parts	1			
1		电器/Electric parts	铸件/Parts	1			

Mark	File no.	Sign	Material/Material	数量/QTY	每件/Unit 重量/Weight (kg)	共计/Total 重量/Weight (kg)	备注/Mark
Design		Standard	Metallurgic Double Girder Overhead Crane				
Proof		Electric	QDY 45/15-22M A7				
Check		approve					
Technology		Date					

河南省大方重型机器有限公司  
Henan Dafang Heavy Machinery Co., LTD

Page No. 1 Weight Ratio  
Total page 1 51700 1:30